



WIWA PLURAL COMPONENT SPRAY SYSTEMS
QUALITY YOU CAN COUNT ON

NEW!

**Spray Technology
Fluid Processing**

Wilhelm Wagner GmbH & Co. KG
P.O.Box 29
D-35631 Lahnuau
Phone: +49(-6441)-609-0
Fax: +49(-6441)-609-50
E-mail: info@wiwa.de
Internet: www.wiwa.com

WIWA Wilhelm Wagner LP
1244 A Executive Blvd., Suite #101
Chesapeake, VA 23320
Toll free: 1-866-661-2139
Fax: 757-436-2103
E-mail: s_nelsen@wiwa.com

WIWA DUOMIX 333PFP

**Successful test for the application of Chartek®7 fireproofing material.
International Coatings certifies the WIWA DUOMIX 333PFP.**

In close cooperation with major coatings manufacturers, such as International Coatings, WIWA continues to develop and optimize plural component spraying equipment for a variety of applications.

Chartek®7 represents the most recent stage of development for International Coatings worldwide proven intumescent fireproofing products. After successful testing, International Coatings has now certified the WIWA DUOMIX 333PFP for the application of this material.



There are many good reasons why WIWA is the right choice, including:

- Over 300 DUOMIX systems in use successfully world wide, under the toughest conditions.
- State-of-the-art technology Made in Germany
- Highly qualified employees, agents and distributors worldwide for local sales and service
- Supply of spare parts and accessories readily available
- Competent customer service in the local language
- Safe and easy system operation
- Individual modifications possible due to modular concept
- Top quality and service at a fair price

Sample System Specifications

Mixing ratio: 2.33:1
Pressure ratio: 61:1
Output per cycle: 329 ccm (11 fl.oz.)
Air consumption: 6000 l/min. (212 scfm)
Electrical supply: 400V
Approx. weight: 1100 kg (2425 lbs)
Dims.(m) 2.56 x 1.3 x 1.98 (LxWxH)
101" x 51" x 78"
Other configurations available



Applications

Offshore oil and gas industry as well as structural fire protection.


This material is used in all areas where, in the event of fire, extreme temperatures could be reached.

THE MODULAR DESIGN ENSURES OPTIMAL PERFORMANCE FOR EVERY APPLICATION

WIWA DUOMIX 333PFP



ATEX 94/9/EG

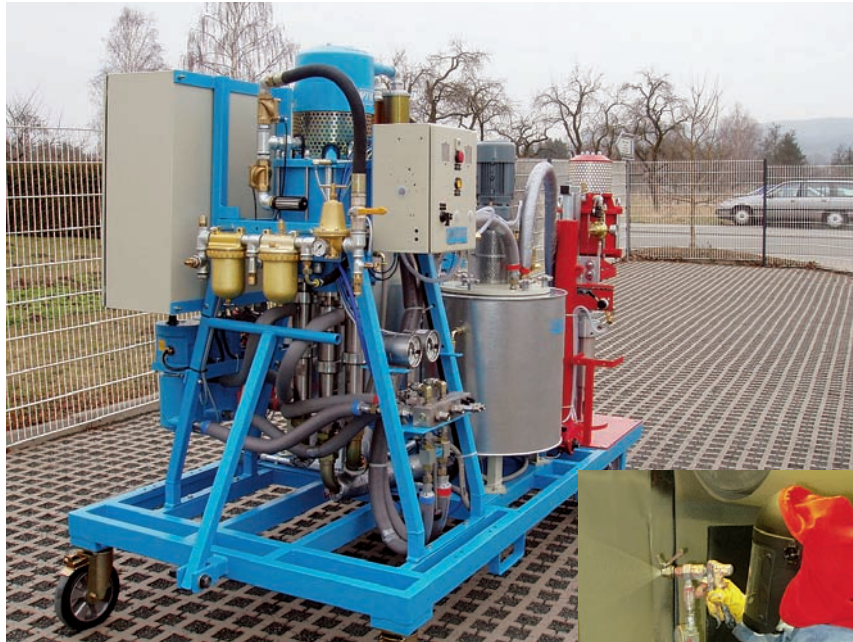

Economical and Environmentally-Friendly

Typical systems include:

- Numerous temperature readings points displayed digitally
- Heated, insulated pressure tanks available in a variety of sizes
- Electrical and/or pneumatic agitators
- Multi-purpose frame, easy to move
- Pressure and metering monitor providing automatic shutdown
- Material feed with shovel pumps (different sizes available)
- Shovel pumps mounted on pneumatic rams
- Optical level control for the pressure tanks with automatic refill

HERKULES PFP

For applying intumescent fire-proofing materials, WIWA also offers standard airless equipment.

For example:
HERKULES PFP available with either an electrical or pneumatic frame-mounted agitator

Pressure ratio: up to 75:1

Output per cycle: up to 360 ccm (12 fl.oz.)

Approx. weight: 230 kg (507 lbs)

Wide variety of accessories available

